

## PT01\_LHAS\_0000\_SM09E\_02.0\_B0

## Description

Single pigtail, E-2000 BTW, APC, fiber 0.9mm\_2m\_yellow, SM G.652.D



Features	Features
<ul style="list-style-type: none"><li>- Automatic metal shutter in connector for dust protection and laser safety</li><li>- One-piece design for easy termination</li><li>- Colour coding of connector</li><li>- Mechanical coding of connector</li><li>- Ideal for HighPower applications</li><li>- Switchable duplex clips</li></ul>	

## Technical Data

## General Data

Description	Values
General Typ	FLSH pigtail
Operation temperature	-40 up to 85°C
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes


## Connector left

Description	Values
Connector typ	FLSH pigtail
Polish	APC
Color Housing	Green
Color Boot	Green
Design connector acc. To	IEC 61754-15, TIA 604-16
Performance class H+S	B
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	65
Durability	1000
Performance class H+S	0

## Cable

Description	Values
Cable typ	Semi-tight Tube
Fiber count	1
Fiber	1 x 0.9 mm
Fiber typ	E9/125-SM ultra G.652.D / G.657.A1

Technical Drawing

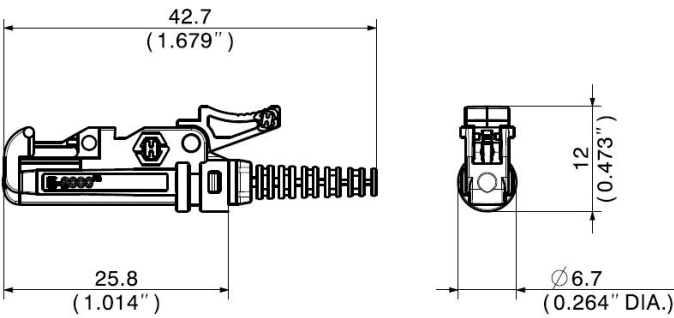

Ordering information

Meter (m)	Item number	Description
	85108037	PT01_LHAS_0000_SM09E_02.0_B0